


Mooring Chains and Accessories

Rokem provides various chains and accessories. Products have been approved by the world major marine classifications, such as CCS, LR, GL, ABS, DNV, NK, BV, RS, RINA and KR.

- DN of Stud link chain can be from 14mm to 107mm
- DN of Studless link chain can be from 6mm to 50mm
- Material of the steel chains responsive to quality class SL2 or SL3
- Every chain link is with end link on both ends
- The chains and the accessories delivered are protected with bituminous paint
- Material of shackles and swivels : forged steel with high-strength
- Warranty against defects in construction, manufacturing or material defect : at least 12 months

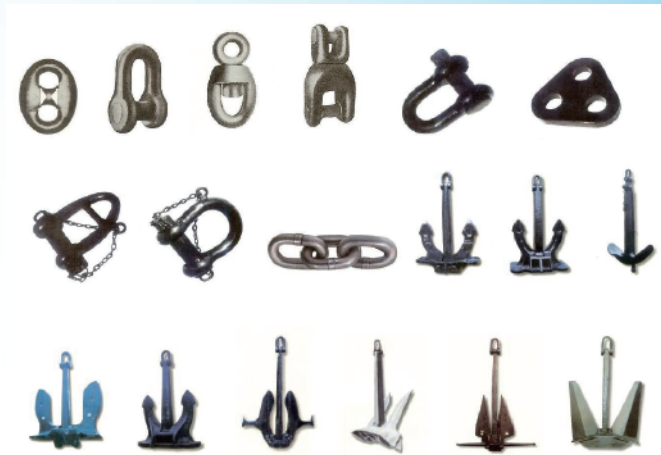

Testing load studless chains (parts)

Chain Diameter	Grade 1		Grade 2		Appros mass (27.5m)	Chain Diameter	Grade 1		Grade 2		Appros mass (27.5m)
	Proof Load	Breakin g Load	Proof Load	Breakin g Load			Proof Load	Breakin g Load	Proof Load	Breakin g Load	
	C=0.00 98	C=0.01 37	C=0.01 37	C=0.01 96			C=0.00 98	C=0.01 37	C=0.01 37	C=0.01 96	
MM	KN	KN	KN	KN	KG	MM	KN	KN	KN	KN	KG
12.5	28.75	57.81	41.2	82.6	93.5	32	188.42	378.88	265.60	531.20	664.60
14	34.78	69.93	51.00	101.90	117.15	34	212.70	427.72	299.90	599.80	752.90
16	47.10	94.72	66.20	132.30	152.90	36	225.58	453.62	318.10	636.05	861.05
17.5	56.35	113.31	78.89	157.78	182.80	38	265.70	534.28	374.40	748.70	957.50
19	66.42	133.57	93.60	187.20	249.50	40	294.40	592.00	414.50	829.10	1056.20
20.5	77.33	155.49	108.64	217.27	275.50	42	324.58	652.68	457.70	915.30	1166.50
22	89.06	179.08	125.40	250.90	328.60	44	356.22	716.32	502.70	999.60	1270.40
24	105.98	213.25	149.90	298.90	385.00	46	389.34	782.92	548.80	1097.60	1396.60
26	115.18	231.69	162.65	324.85	449.00	48	423.94	852.48	597.80	1195.60	1520.60
28	144.26	290.08	203.80	406.70	516.70	50	460.00	926.09	648.80	1293.60	1650.00
30	165.60	333.00	234.20	467.50	589.40						



Accessories (parts)

Shackles		Swivel	
Dia (mm)	Weight (kgs)	Dia (mm)	Weight (kgs)
14	1.5	14	1.05
20	2.1	18	2.17
26	4.5	20	2.1
30	6.32	26	5.79
35	10.82	30	9
		35	14.16
		40	20.25

Testing load stud link chains (parts)

Chain Diameter	Grade 2		Grade 3		Appros mass (27.5m)	Chain Diameter	Grade 2		Grade 3		Appros mass (27.5m)
	Proof Load	Breakin g Load	Proof Load	Breakin g Load			Proof Load	Breakin g Load	Proof Load	Breakin g Load	
	C=0.0098	C=0.0137	C=0.0137	C=0.0196			C=0.0098	C=0.0137	C=0.0137	C=0.0196	
MM	KN	KN	KN	KN	KG	MM	KN	KN	KN	KN	KG
14	82	116	116	165	125	44	769	1080	1080	1540	1210
16	107	150	150	216	160	46	837	1170	1170	1680	1320
17.5	127	179	179	256	190	48	908	1270	1270	1810	1438
19	150	211	211	301	225	40	981	1370	1370	1960	1546
20.5	175	244	244	349	265	52	1060	1480	1480	2110	1661
22	200	280	280	401	300	54	1140	1590	1590	2270	1791
24	237	332	332	476	360	56	1220	1710	1710	2430	1926
26	278	389	389	556	420	58	1290	1810	1810	2600	2075
28	321	449	449	642	490	60	1380	1940	1940	2770	2220
30	368	514	514	735	565	62	1470	2060	2060	2940	2373

Notes: Specifications could be changed without notice in advance.
Please consult local agency or manufacture for details or updates